


# 45° 公制内螺纹 24° 锥带 O 型圈重系列

45° METRIC FEMALE 24° CONE O-RING H. T. DIN3865

**20541-W      •      20541-T**

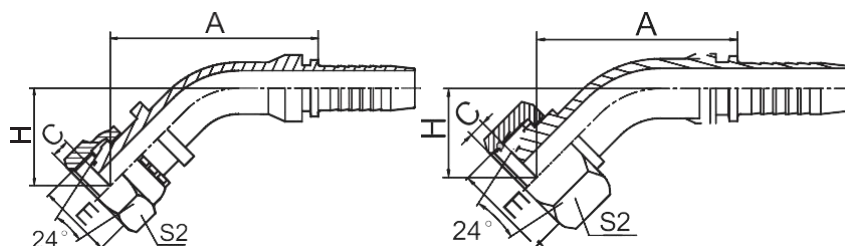

代号尺寸:

| 代号<br>PART NO. |                | 螺 纹 E<br>THREAD E | 软 管<br>HOSE SIZE |            | 管子外径<br>TUBE<br>O.D. | O 形圈<br>O-RING | 尺 寸<br>DIMENSIONS |     |      |    |
|----------------|----------------|-------------------|------------------|------------|----------------------|----------------|-------------------|-----|------|----|
| 编织<br>BRAIDED  | 缠绕<br>SPIRAL   |                   | 公称内径<br>DN       | 标号<br>DASH |                      |                | A                 | C   | H    | S2 |
| 20541-14-04WZ  | -              | M16X1.5           | 6                | 4          | 6                    | O04.5X1.5      | 38.1              | 1.1 | 16   | 17 |
| 20541-16-04TZ  | -              | M16X1.5           | 6                | 4          | 8                    | O06.5X1.5      | 38.4              | 1.8 | 16.3 | 19 |
| 20541-16-05WZ  | -              | M16X1.5           | 8                | 5          | 8                    | O06.5X1.5      | 38.4              | 1.5 | 16.3 | 19 |
| 20541-18-04TZ  | -              | M18X1.5           | 6                | 4          | 10                   | O08.0X1.5      | 39.1              | 1.5 | 17   | 22 |
| 20541-18-06TZ  | 20542-18-06TZ  | M18X1.5           | 10               | 6          | 10                   | O08.0X1.5      | 43.8              | 1.5 | 17.3 | 22 |
| 20541-20-06TZ  | 20542-20-06TZ  | M20X1.5           | 10               | 6          | 12                   | O10.0X1.5      | 42.5              | 2.5 | 18.5 | 24 |
| 20541-20-08WZ  | 20542-20-08WZ  | M20X1.5           | 12               | 8          | 12                   | O10.0X1.5      | 42.8              | 2.5 | 19   | 24 |
| 20541-22-06TZ  | 20542-22-06TZ  | M22X1.5           | 10               | 6          | 14                   | O11.0X2.0      | 42                | 3   | 18   | 27 |
| 20541-22-08TZ  | 20542-22-08TZ  | M22X1.5           | 12               | 8          | 14                   | O11.0X2.0      | 49.6              | 2.5 | 20.7 | 27 |
| 20541-24-08TZ  | 20542-24-08TZ  | M24X1.5           | 12               | 8          | 16                   | O13.0X2.0      | 47.3              | 3   | 21   | 30 |
| 20541-24-10WZ  | 20542-24-10WZ  | M24X1.5           | 16               | 10         | 16                   | O13.0X2.0      | 49.7              | 3   | 22.9 | 30 |
| 20541-30-10TZ  | 20542-30-10TZ  | M30X2             | 16               | 10         | 20                   | O16.3X2.4      | 57.3              | 2.5 | 25   | 36 |
| 20541-30-12TZ  | 20542-30-12TZ  | M30X2             | 20               | 12         | 20                   | O16.3X2.4      | 65.8              | 2.5 | 26.7 | 36 |
| 20541-36-12TZ  | 20542-36-12TZ  | M36X2             | 20               | 12         | 25                   | O20.3X2.4      | 67.1              | 3.2 | 30.5 | 46 |
| 20541-42-16TZ  | 20542-42-16TZ  | M42X2             | 25               | 16         | 30                   | O25.3X2.4      | 81                | 3.9 | 35.5 | 50 |
| 20541-52-20TZ  | 20542N-52-20TZ | M52X2             | 32               | 20         | 38                   | O33.3X2.4      | 101.7/104.3       | 4.5 | 39.4 | 60 |
| 20541-52-24TZ  | 20542N-52-24TZ | M52X2             | 40               | 24         | 38                   | O33.3X2.4      | 114.1/117.1       | 4.5 | 43.4 | 60 |

注： 1.尺寸 A 中"/"前尺寸适用于编织管接头,"/"后尺寸适用于缠绕管接头。

Notes: 1.The dimension A before"/" is for braided hose fitting and after "/" is for spiral hose fitting.