


英管外螺纹 60° 内锥或六角端面用组合垫密封/

英管外螺纹 O 形圈

BSP MALE DOUBLE USE FOR 60° CONE SEAT OR
BONDED SEAL / BSP MALE O-RING

1BG-OG

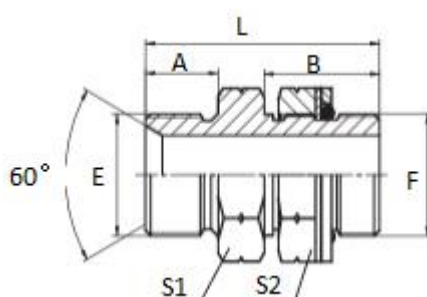

代号尺寸:

代号 PART NO.	螺 纹 THREAD		O 形圈 F 端 O-RING F 端	尺 寸 DIMENSIONS				
	E	F		A	B	L	S1	S2
1BG-04OGZ	G1/4"X19	G1/4"X19	O111	12	21	39	19	19
1BG-04-06OGZ	G1/4"X19	G3/8"X19	O113	12	24	42	19	22
1BG-06-04OGZ	G3/8"X19	G1/4"X19	O111	13.5	21	42.5	22	19
1BG-06OGZ	G3/8"X19	G3/8"X19	O113	13.5	24	45.5	22	22
1BG-06-08OGZ	G3/8"X19	G1/2"X14	O17.86X2.62	13.5	28	49.5	22	27
1BG-08-06OGZ	G1/2"X14	G3/8"X19	O113	16	24	50	27	22
1BG-08OGZ	G1/2"X14	G1/2"X14	O17.86X2.62	16	28	54	27	27
1BG-12OGZ	G3/4"X14	G3/4"X14	O119	18.5	32.5	62	32	32
1BG-16-08OGZ	G1"X11	G1/2"X14	O17.86X2.62	20.5	28	61.5	41	27
1BG-16-12OGZ	G1"X11	G3/4"X14	O119	20.5	32.5	66	41	32
1BG-16OGZ	G1"X11	G1"X11	O217	20.5	32.5	66	41	41
1BG-20-08OGZ	G1.1/4"X11	G1/2"X14	O17.86X2.62	20.5	28	63.5	50	27
1BG-20OGZ	G1.1/4"X11	G1.1/4"X11	O222	20.5	33	68.5	50	50
1BG-24OGZ	G1.1/2"X11	G1.1/2"X11	O224	23	34	72	55	55

注: F 螺纹端与 ISO 1179-1 油口匹配使用。 Note: F thread end fit with ISO1179-1 port.