


英管外螺纹 60° 内锥或六角端面用组合垫密封/

美制 SAE 外螺纹 O 形圈轻系列 ISO 11926-3

BSP MALE DOUBLE USE FOR 60° CONE SEAT OR BONDED SEAL/

SAE O-RING BOSS L-SERIES ISO 11926-3

1B0

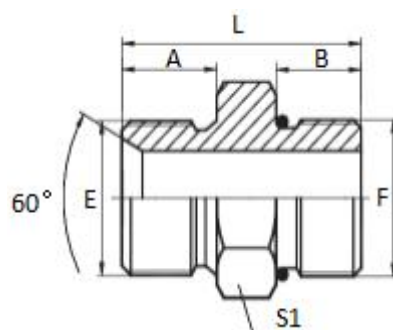

代号尺寸:

代号 PART NO.	螺 纹 THREAD		O 形圈 F 端 O-RING F 端	尺 寸 DIMENSIONS			
	E	F		A	B	L	S1
1BO-04Z	G1/4"X19	7/16"X20	O904	12	9.1	29	19
1BO-04-05Z	G1/4"X19	1/2"X20	O905	12	9.1	27	19
1BO-04-06Z	G1/4"X19	9/16"X18	O906	12	9.9	28	19
1BO-04-08Z	G1/4"X19	3/4"X16	O908	12	11.1	31	22
1BO-06Z	G3/8"X19	9/16"X18	O906	13.5	9.9	33.5	22
1BO-06-04Z	G3/8"X19	7/16"X20	O904	13.5	9.1	33	22
1BO-06-08Z	G3/8"X19	3/4"X16	O908	13.5	11.1	32.5	22
1BO-06-10Z	G3/8"X19	7/8"X14	O910	13.5	12.7	36	27
1BO-08Z	G1/2"X14	3/4"X16	O908	16	11.1	37	27
1BO-08-06Z	G1/2"X14	9/16"X18	O906	16	9.9	38	27
1BO-08-10Z	G1/2"X14	7/8"X14	O910	16	12.7	38.5	27
1BO-08-12Z	G1/2"X14	1.1/16"X12	O912	16	15.1	42	32
1BO-10Z	G5/8"X14	7/8"X14	O910	17.5	12.7	43	30
1BO-10-08Z	G5/8"X14	3/4"X16	O908	17.5	11.1	41.5	30
1BO-10-12Z	G5/8"X14	1.1/16"X12	O912	17.5	15.1	43.5	32
1BO-12Z	G3/4"X14	1.1/16"X12	O912	18.5	15.1	44.5	32
1BO-12-08Z	G3/4"X14	3/4"X16	O908	18.5	11.1	40.5	32

1BO-12-10Z	G3/4"X14	7/8"X14	O910	18.5	12.7	45.5	32
1BO-12-14Z	G3/4"X14	1.3/16"X12	O914	18.5	15.1	44.5	36
1BO-12-16Z	G3/4"X14	1.5/16"X12	O916	18.5	15.1	44.5	38
1BO-16Z	G1"X11	1.5/16"X12	O916	20.5	15.1	48	41
1BO-16-10Z	G1"X11	7/8"X14	O910	20.5	12.7	49.5	41
1BO-16-12Z	G1"X11	1.1/16"X12	O912	20.5	15.1	51.5	41
1BO-16-14Z	G1"X11	1.3/16"X12	O914	20.5	15.1	51.5	41
1BO-16-20Z	G1"X11	1.5/8"X12	O920	20.5	15.1	50.5	50
1BO-20Z	G1.1/4"X11	1.5/8"X12	O920	20.5	15.1	50.5	50
1BO-20-16Z	G1.1/4"X11	1.5/16"X12	O916	20.5	15.1	54.5	50
1BO-24Z	G1.1/2"X11	1.7/8"X12	O924	23	15.1	53	55

注：F 螺纹端与 ISO 11926-1 油口匹配使用。 Note: F thread end fit with ISO11926-1 port.