


英管外螺纹 O 形圈/英管内螺纹 60° 外锥

BSP MALE O-RING/BSP FEMALE 60° CONE

2GB

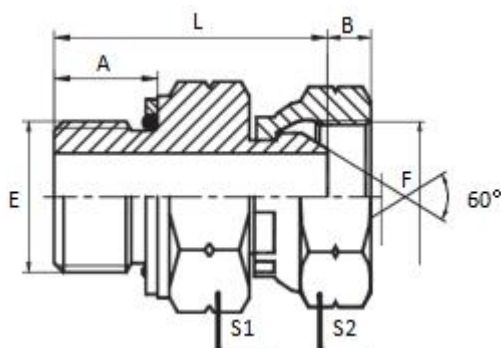

代号尺寸:

代号 PART NO.	螺 纹 THREAD		O 形圈 E 端 O-RING E 端	尺 寸 DIMENSIONS				
	E	F		A	B	L	S1	S2
2GB-02Z	G1/8"X28	G1/8"X28	O7.97X1.88	9.5	5.5	24.5	14	14
2GB-04-02Z	G1/4"X19	G1/8"X28	O111	10	5.5	25	19	14
2GB-04Z	G1/4"X19	G1/4"X19	O111	11	5.5	29.5	19	19
2GB-04-06Z	G1/4"X19	G3/8"X19	O111	10	6.3	28.2	19	22
2GB-06Z	G3/8"X19	G3/8"X19	O113	11.5	6.3	32	24	22
2GB-06-04Z	G3/8"X19	G1/4"X19	O113	11.5	5.5	30.5	24	19
2GB-06-08Z	G3/8"X19	G1/2"X14	O113	11.5	7.5	34	24	27
2GB-08Z	G1/2"X14	G1/2"X14	O17.86X2.62	14	7.5	38	27	27
2GB-08-06Z	G1/2"X14	G3/8"X19	O17.86X2.62	14	6.3	36.2	27	22
2GB-08-10Z	G1/2"X14	G5/8"X14	O17.86X2.62	14	9.5	38.5	27	30
2GB-08-12Z	G1/2"X14	G3/4"X14	O17.86X2.62	14	10.9	39.1	27	32
2GB-12Z	G3/4"X14	G3/4"X14	O119	15.5	10.9	41	36	32
2GB-12-08Z	G3/4"X14	G1/2"X14	O119	15.5	7.5	39.5	36	27
2GB-12-16Z	G3/4"X14	G1"X11	O119	15.5	11.7	41.8	36	41
2GB-16Z	G1"X11	G1"X11	O217	18.6	11.7	46.5	41	41
2GB-16-12Z	G1"X11	G3/4"X14	O217	18	10.9	46.1	41	32
2GB-20Z	G1.1/4"X11	G1.1/4"X11	O222	20	10.1	55	50	50
2GB-20-16Z	G1.1/4"X11	G1"X11	O222	20	11.7	51.3	50	41
2GB-24Z	G1.1/2"X11	G1.1/2"X11	O224	21.5	13	55.5	60	55

注：E 螺纹端与 ISO 1179-1 油口匹配使用。 Note: E thread end fit with ISO1179-1 port.